




# DuPont™ Cyrel® FAST DVF

## Thermal Process Digital Plate for Varnishing

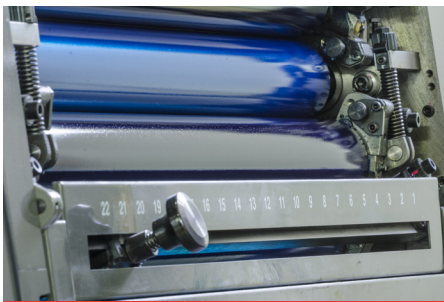

DuPont™ Cyrel® FAST DVF

DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates (analogue and digital), Cyrel® platemaking equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.

DuPont™ Cyrel® Systems: Higher quality at high speed.

**The DuPont™ Cyrel® DVF plates are ideal for varnishing and special effect ink and coatings applications.**

### Applications

These photopolymer plates offer high quality print finishing on folding cartons, such as food packaging, cigarettes, cosmetics, etc. They are also used in commercial printing for spot coating of catalogues, calendars, books and brochures.

Cyrel® DVF plates can be used for inline and offline coating of:

- Aqueous coating
- UV-Lacquer
- Metallic ink
- DuPont™ Iriodin® pigmented ink

### Product Features

- Excellent coating and ink transfer permits superior coating
- High resolution and exact register results in fine detail and complex forms can be spot coated and printed in the coating tower
- High durability for long print runs
- Image relief is clean and sharp
- Can be used again and again without any loss of registration

### Printing Ink and Solvent Compatibility

Cyrel® DVF plates offer excellent compatibility with UV-lacquers and water-based inks. The enforced polyester base will maintain accurate registration even with large plates.

### Platemaking

The Cyrel® FAST thermal developer allows the production of Cyrel® FAST finished plates in less than one hour, making it the ideal just-in-time platemaking system for a market that demands quick turnaround at the highest possible quality. The Cyrel® FAST thermal developer delivers outstanding plate quality and uniformity. This processor has the ability to produce a finished plate without solvent washout. The Cyrel® ECLF for exposing and light finishing plates is available to complement the Cyrel® FAST thermal developer.



Download latest version

# DuPont™ Cyrel® FAST DVF

## Thermal Process Digital Plate for Varnishing

### Process of Use

DuPont™ Cyrel® DVF is designed to work with Cyrel® FAST thermal platemaking processors. Expose the plate through the back to establish the floor and activate the plate. Back exposure varies according to relief required. Remove the protective coversheet and image the plate with a Cyrel® Digital Imager (CDI). Expose the front of the plate surface. Process the plate in a light finisher to eliminate surface tackiness. Post-expose the plate to ensure complete polymerization.

### Mounting

Cyrel® Microflex mounting devices are recommended for mounting Cyrel® DVF plates. The double sided adhesive should first be applied to the cylinder or sleeve – not the plate – to ensure easier and precise laydown. The polyester base will maintain accurate register even with large plates.

### Storage – Raw Material

Store unexposed plates in a cool area (4–32°C, 40–90°F), away from direct sources of heat. Humidity control is not required. Cyrel® DVF is foam interleaved to provide maximum protection of the plate after manufacture, and during transportation and storage. Plates should be stacked flat. Plates should not be exposed to direct sunlight or excessive white light. Continuous exposure to very high ozone concentrations should be avoided.

### Handling – Raw Material

Like all photopolymer plates, Cyrel® DVF plates should be handled under UV free light; e.g. fluorescent tubes covered with amber sleeves.

### Storage – Finished Plates

After printing, plates should be thoroughly cleaned with a compatible solvent before storing. They may be stored on cylinders, sleeves or demounted and stored flat.

Technical Data	
	<b>Cyrel® DVF Thickness</b> <b>1,14 mm / 0,045"</b>
<b>Durometer</b>	73 Sh A
<b>Image Reproduction</b>	1–98% / 60 L/cm
<b>Minimum Positive Line Width</b>	0,050 mm / 2 mil
<b>Minimum Isolated Dot Size</b>	200 µm
<b>Relief Depth</b>	0,55 mm / 0,022"
<b>Processing</b>	Thermal / Digital

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

DuPont de Nemours (Deutschland) GmbH  
DuPont Electronics & Communications  
Hugenottenallee 175  
63263 Neu-Isenburg  
Germany  
Tel: +49 (0) 6102 18 1592

DuPont (U.K.) Limited  
DuPont Electronics & Communications  
Wedgwood Way, Stevenage  
Hertfordshire SG1 4QN  
United Kingdom  
Tel: +44 (0) 1438 73 4863

[www.cyrel.eu](http://www.cyrel.eu)

© 2014 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™ and Cyrel® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.